


Cross Section

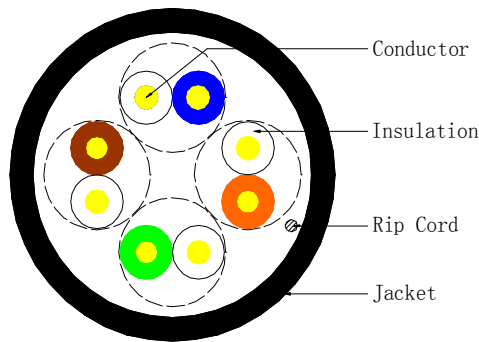

Electrical Characteristics(20°C)

Standard: TIA/EIA-568-B.2 & IEC/ISO 11801
 Product Standard Certification: E310605

Test Item	Units	Spec
1. Conductor D.C. Resistance	Ω/100m	≤9.5
2. Unbalance of Pair D.C Resistance	%	≤2.5
3. Dielectric Strength between Pairs	kv/min	≤1.0
4. Insulation Resistance	MΩ·km	≥5000
5. Capacitance	nF/100m	≤5.6
6. Unbalance of Capacitance	pF/100m	≤330
7. Characteristic impedance(1 to 100MHz)	Ω	100±15
8. Characteristic impedance(155 to 350MHz)	Ω	100±25
9. Short or Open of the loop	—	None
10. Shield	—	—

Cable Description

1) Conductor :	
Pairs	4
Total Conductor	8
AWG	24
Dia. of Conductor	Φ 0.50±0.01mm
Material	Solid Bare Copper
Elongation	≥15%
2) Insulate :	
Material	HDPE - Polyethylene
Nom. Thickness	0.19mm
Dia.	Φ 0.88±0.03mm
Elongation	≥300%
Color Cord	Pair 1: White-Blue & Blue Pair 2: White-Orange & Orange Pair 3: White-Green & Green Pair 4: White-Brown & Brown
3) Paired :	
Length of Lay	<30mm
4) Cabling:	
Order of the Pair	See the Cross Section
5) Sheath:	
Material	LDPE - Polyethylene
Color	Black
Rip Cord	200D×3
Nom. Thickness	1.20±0.10mm
Min. Thickness	1.00mm
O.D.	Φ 6.50±0.50mm
Marking	Per Customer
6) Packing:	
Packing Mark	Accord to Contract
Appearance	Orderliness
Reel	Per Request

Frequency (MHz)	RL (dB)	SRL (dB)	ATTEN (dB/100m)	NEXT (dB/100m)
1	20.0	28.0	2.0	65.3
4	23.0	28.0	4.0	56.3
8	24.5	28.0	5.7	51.8
10	25.0	28.0	6.4	50.3
16	25.0	28.0	8.2	47.2
20	25.0	25.0	9.2	45.8
25	24.3	27.0	10.3	44.3
31.25	23.6	26.1	11.6	42.9
62.5	21.5	23.1	16.8	38.4
100	20.1	21.0	21.7	35.3
155	18.8	19.1	27.6	32.5
200	18.0	18.0	31.8	30.8
250	17.3	17.0	36.1	29.3
300	16.8	16.2	40.0	28.1
350	16.3	15.6	43.8	27.1

Frequency (MHz)	PSNEXT (dB/100m)	ELFEXT (dB/100m)	PSELFEXT (dB/100m)	Delay (ns/100m)
1	62.3	64.0	61.0	45.0
4	53.3	52.0	49.0	45.0
8	48.8	45.9	42.9	45.0
10	47.3	44.0	41.0	45.0
16	44.2	39.9	36.9	45.0
20	42.8	38.0	35.0	45.0
25	41.3	36.0	33.0	45.0
31.25	39.9	34.1	31.1	45.0
62.5	35.4	28.1	25.1	45.0
100	32.3	24.0	21.0	45.0
155	29.5	20.2	17.2	45.0
200	27.8	18.0	15.0	45.0
250	26.3	16.0	13.0	45.0
300	25.1	14.5	11.5	45.0
350	24.1	13.1	10.1	45.0

Other Characteristics

Suttle	35.00 kg/km
Length	100m Coil 305m Reel Box 500m Plywood Drum 1000m Plywood Drum 2000m Plywood Drum

Mechanical characteristics

Test Object	Jacket
Test Material	LDPE
Operating Temperature Range	-40°C to +65°C

Revision History

Date : Define by : Rev : A/0

Prepared by : King Date: 2007-01-16

Approved by: WangYuanYuan Page: 1 of 1

Structured Cable Products



Tel. : 866-470-5742

Fax : 945-327-8176

Email : sales@scpcat5e.com