


THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF  
**STRUCTURED CABLE PRODUCTS** AND SHALL NOT BE  
 REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE  
 PRIOR WRITTEN CONSENT OF **STRUCTURED CABLE PRODUCTS**


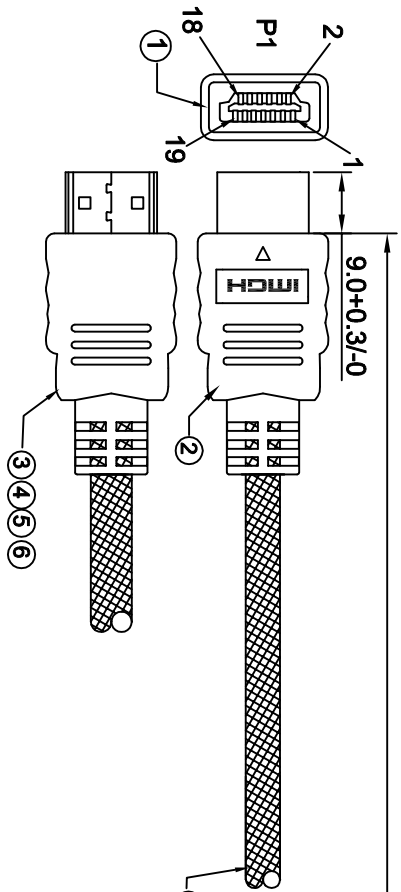


- ELECTRIC TESTING:**
1. 100% OPEN & SHORT TESTING
  2. INSULATION RESISTANCE:  $\geq 5M\Omega$  (min)
  3. CONDUCTOR RESISTANCE:  $\leq 2\Omega$  (max)
  4. VOLTAGE: 300V DC/10ms

10	Cable: HDMI 1.4 CABLE 30#(5P+4C)+AEB OD:6.5 Jacket : Black PVC with Marking : E302625 UL(logo) AWM 20276 80°C 30V VW-1 HIGH SPEED HDMI® CABLE WITH ETHERNET ASIA TAI with Black PET Braid
9	Cardboard: 160mm*165mm/2 (0.46m)
8	PE Bag: 160mm*210mm*0.1mm (NO Marking)
7	PE film - Breadth: 15mm.
6	Copper Foil : W25*60mm*0.06mm
5	Adhesive Tape : ①W5*25mm*2pcs ②W20*60mm*2pcs
4	TUBE: ① 0.8*10mm ② 2.0*8mm
3	Inner Molding-PE Plastic
2	UL45P-000A Black PVC (Rohs)
1	HDMI 19P/M Shell-Gold Plated, PIN - Gold Plated 3U"
ITEM	SPECIFICATION


(L)

Part No.	Length(L)	Hank size(D)
944E-1.5N	460±20mm	80±10mm
944E-3N	915±30mm	110±10mm
944E-6N	1830±30mm	120±10mm

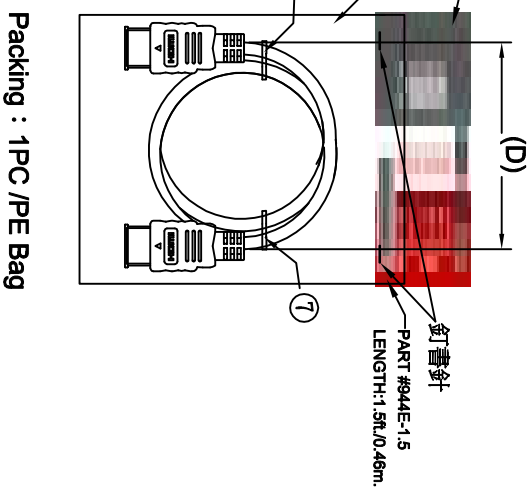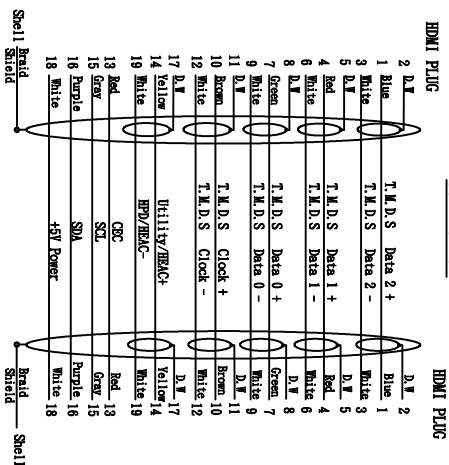

REV.	REVISED DESCRIPTION	DATE	CHECKED
A1	FIRST RELEASE	09/2012	

TOLERANCES UNLESS OTHERWISE STATED  
 X. = ± 1  
 .X = ± 0.2  
 .XX = ± 0.1



**Structured Cable Products**  
Quality Installations Deserve Quality Products

ERP NO.:	DOC No.:	CUSTOMER P/N:	944E-*N
CUSTOMER:	SCP	CUSTOMER P/N:	HDMI A/P TO HDMI A/P
DESCRIPTION	High Speed With Ethernet	CHECKED	DRAWN
APPROVAL			CJJ