



# Structured Cable Products®

Quality Installations Deserve Quality Products

www.scp5e.com  
 sales@scp5e.com  
 Direct: 954-327-5770  
 Toll Free: 866-470-5742

**SCP PART#: CAT6-BL**

UPC: 810070014698


CAT6 ENHANCED 550 MHz 23 AWG SOLID BC, 4PR, UTP, ANSI/TIA 568-C.2, ISO/IEC 11801 CLASS E, UL CMR, EN50575:2014 Eca, PVC JKT- BLUE- 1000FT/305M BOX

**Description:**

CAT6 ENHANCED 550 MHz 23 AWG SOLID BC, 4PR, UTP, ANSI/TIA 568-C.2, IEC 11801 CLASS E, UL CMR, EN50575:2014 Eca, PVC JKT 1000FT/305M BOX

**Regulatory:**

UL: UL 444, TIA/EIA 568-C.2 and ISO/IEC 11801 Ed2 Type (UL) CMR or c(UL) FT4  
 EU RoHS 2011/65 EU Compliant  
 EN50575:2014 Reaction to fire Class Eca

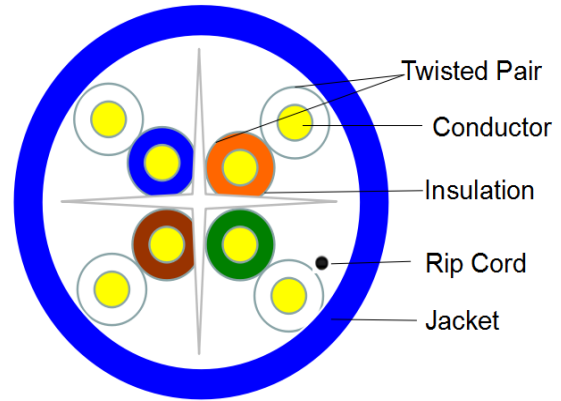

**Application:**

Networking Lan Cable

**Construction Characteristics:**

Conductor	Material	Solid Bare Copper
	Size	23AWG X 4P
	Construction	1/0.57+/-0.005mm
Insulation	Material	HDPE
	Min.Thickness	0.200mm
	AVG.Thickness	0.220mm
	Diameter	1.03+/-0.01mm
	Colors	Blue- White/Blue Orange-White/Orange Green-White/Green Brown-White/Brown
Jacket	Material	PVC
	Min.Thickness	0.54mm
	AVG.Thickness	0.60mm
	Diameter	6.20+/-0.10mm
	Rip Cord	Nylon
Bend Radius	Color	Per request
		Min 20D/125mm

**Electrical & Physical Characteristics:**

Operating Temperature Range		- 20°C +75°C	
Conductor Resistance		Max 72.2ohm/km at 20°C	
Dielectric Strength		Min AC1.5KV	
Spark Test		5.0KV	
Insulation	Unaged	Tensile Strength	16.5Mpa
		Elongation	500%
	Aged	Tensile Strength	14.2Mpa(100°C 168h)
		Elongation	250%(100°C 168h)
Jacket	Unaged	Tensile Strength	13.8Mpa
		Elongation	100%
	Aged	Tensile Strength	11.7Mpa(100°C 168h)
		Elongation	50%(100°C 168h)
Rated Voltage		Max 300Volts	
DC Resisitance Unbalance		Max 5%	
Pair-to-Ground Capacitance Unbalance		Max 3300pF/km	
Characteristic Impedance		100+/-150OHM	
Nominal Velocity of Propagation(%)		67~69	
Propagation Delay		Max 536ns/100m	
Delay Skew		Max 45ns/100m	

**Marking:**

STRUCTURED CABLE PRODUCTS --- CAT6 --- CAT6 ENHANCED 550MHz UTP ANSI/TIA-568-C.2 ISO/IEC 11801 CLASS E  
 E198134 SCP3 (UL) C(UL) CMR 4PR 23AWG SOL BC - EN50575:2014 CE Eca PVC JKT FT4 75C EU RoHS EC  
 ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 \*\*\*M

**Packaging:**

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
14.2kgs/31.305lbs	400X290X400	1000FT/Box	36



# Structured Cable Products®

Quality Installations Deserve Quality Products

www.scp5e.com  
 sales@scp5e.com  
 Direct: 954-327-5770  
 Toll Free: 866-470-5742

**SCP PART#: CAT6-BL**

UPC: 810070014728

CAT6 ENHANCED 550 MHz 23 AWG SOLID BC, 4PR, UTP, ANSI/TIA 568-C.2, ISO/IEC 11801 CLASS E, UL CMR, EN50575:2014 Eca, PVC JKT- BLUE- 1000FT/305M BOX

### Performance-1

ITEM Frequency	Attenuation Max (dB/100m)		NEXT Min (dB)		PS NEXT Min (dB)		ACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	Standard	SCP
1	2	1.9	74.3	80.3	72.3	76.6	72.3	78.4
4	3.8	3.7	65.3	75.6	63.3	74.2	61.5	71.9
8	5.3	5.1	60.8	66	58.8	65.1	55.5	60.9
10	6	5.8	59.3	67.6	57.3	65.9	53.3	61.8
16	7.6	7.4	56.2	70.8	54.2	67.2	48.6	63.4
20	8.5	8.2	54.8	71.9	52.8	69.1	46.3	63.7
25	9.5	9.1	53.3	62.3	51.3	60.8	43.8	53.2
31.25	10.7	9.9	51.9	68.7	49.9	67.1	41.2	58.8
62.5	15.4	15	47.4	59.6	45.4	58.3	32	44.6
100	19.8	18.8	44.3	60	42.3	58	24.5	41.2
200	29	27.4	39.8	57.5	37.8	56	10.8	30.1
250	32.8	29.4	38.3	55.8	36.3	54.1	5.5	26.4
300	36.4	33.3	37.1	54.2	35.1	53.4	0.7	20.9
400	43	38.6	35.3	53.8	33.3	52.1	---	---
500	48.9	43.9	33.8	51	31.8	49.3	---	---

### Performance-2

ITEM Frequency	RL Min (dB)		ELFEXT Min (dB)		PS ELFEXT Min (dB)		PSACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	Standard	SCP
1	20	23.6	67.8	75.6	64.8	73.3	70.3	74.7
4	23	23.9	55.8	61.3	52.8	60.1	59.5	70.5
8	24.5	30	49.7	55.7	46.7	54.8	53.5	60
10	25	28.5	47.8	55.2	44.8	53.2	51.3	60.1
16	25	28.2	43.7	49.7	40.7	48.1	46.6	59.8
20	25	27.8	41.8	48.1	38.8	46.2	44.3	60.9
25	24.3	27.5	39.8	45.9	36.8	45	41.8	51.7
31.25	23.6	24.9	37.9	42.7	34.9	41.7	39.2	57.2
62.5	21.5	24.1	31.9	39.4	28.9	37.4	30	43.3
100	20.1	23.5	27.8	35	24.8	33.2	22.5	39.2
200	18	23.2	21.8	32.8	18.8	30.2	8.8	28.6
250	17.3	21.5	19.8	30.7	16.8	27.7	3.5	24.7
300	16.8	20.8	18.3	26.5	15.3	25.4	---	---
400	15.9	18.9	15.8	23.4	12.8	22.1	---	---
500	15.2	18.6	13.8	19.5	10.8	18.7	---	---