



Structured Cable Products™

Quality Installations Deserve Quality Products

www.scpcat5e.com
 sales@scpcat5e.com
 Direct: 954-327-5770
 Toll Free: 866-470-5742

SCP PART#: SP-2.5/2-LSZH-BK

UPC: 817777015324

Description:


COMMERCIAL SPEAKER CABLE - Cca RATED - 2 COND/2.5mm2
 (14awg) 50x0.25mm (STANDARD CLASS 5) OXYGEN FREE COPPER,
 EN50575:2014 Cca-s1,d1,a1 LOW SMOKE ZERO HALOGEN
 BLACK JKT- 305M/1000FT SPOOL

Regulatory:

EN50575:2014 REACTION TO FIRE CLASS Cca-s1,d1,a1

Application:

Commercial Speaker Cable

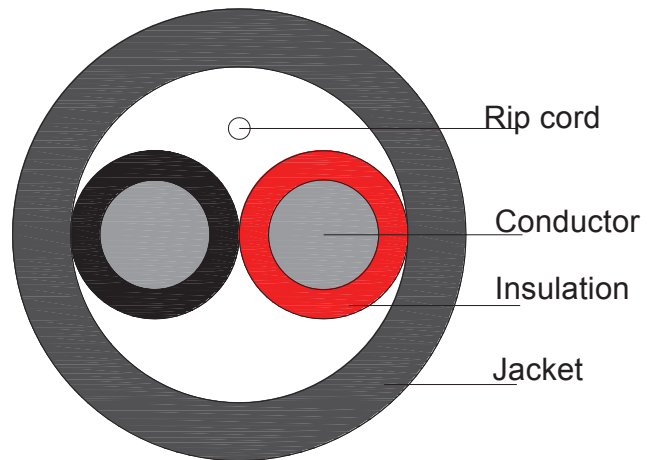

Construction Characteristics:

Conductor	Material	Stranded Oxygen Free Copper
	Size	16AWG X 2C/2.5mm2
	Construction	50*0.25±0.008mm
Insulation	Material	LSZH
	Diameter	2.70±0.05mm
	Colors	Black, Red,
Jacket	Material	LSZH
	AVG.Thickness	0.70mm
	Diameter	6.8±0.3mm
	Rip Cord	Stranded rip cord
	Color	Black

Electrical & Physical Characteristics:

Rated Voltage		300Volts
Test Voltage		800V/min
Minimum Bend Radius		8×O.D.
Conductor Resistance		≤8.62Ω/km
Minimum Installation Temperature		-20°C
Insulation	Before	Tensile Strength(Mpa) ≥10.0
		Elongation ≥125
	Aging Period 100°C×168h	
	After	Tensile Strength(Mpa) ≥8.0
	Elongation ≥100	

Marking:

STRUCTURED CABLE PRODUCTS -- SP-2.5/2-LSZH -- 2C/2.50mm² (14AWG) 50x0.25mm STRAND OXYGEN FREE COPPER LSZH
 JKT EN50575:2014 CE Cca-s1,d1,a1 RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M

Packaging:

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
24.7kgs/54.45418lbs	370x370x220	305m/1000ft REEL	36