

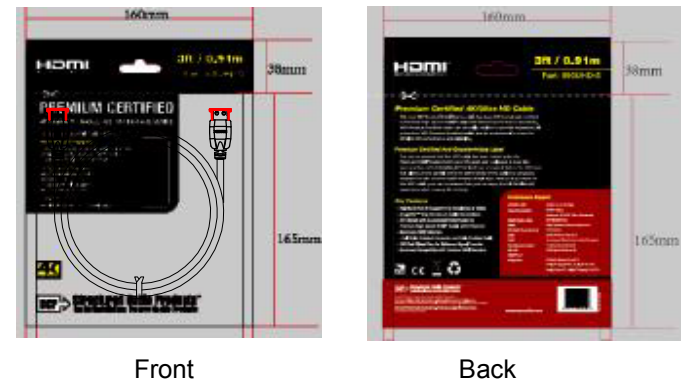


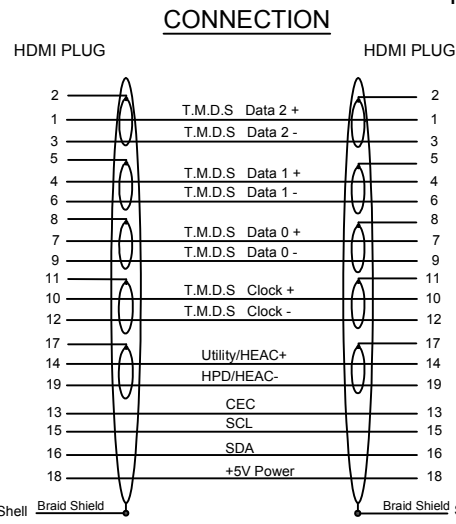

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF **STRUCTURED CABLE PRODUCTS** AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF **STRUCTURED CABLE PRODUCTS**

REV.	REVISED DESCRIPTION	DATE	CHECKED
A1	FIRST RELEASE	2016.05.17	

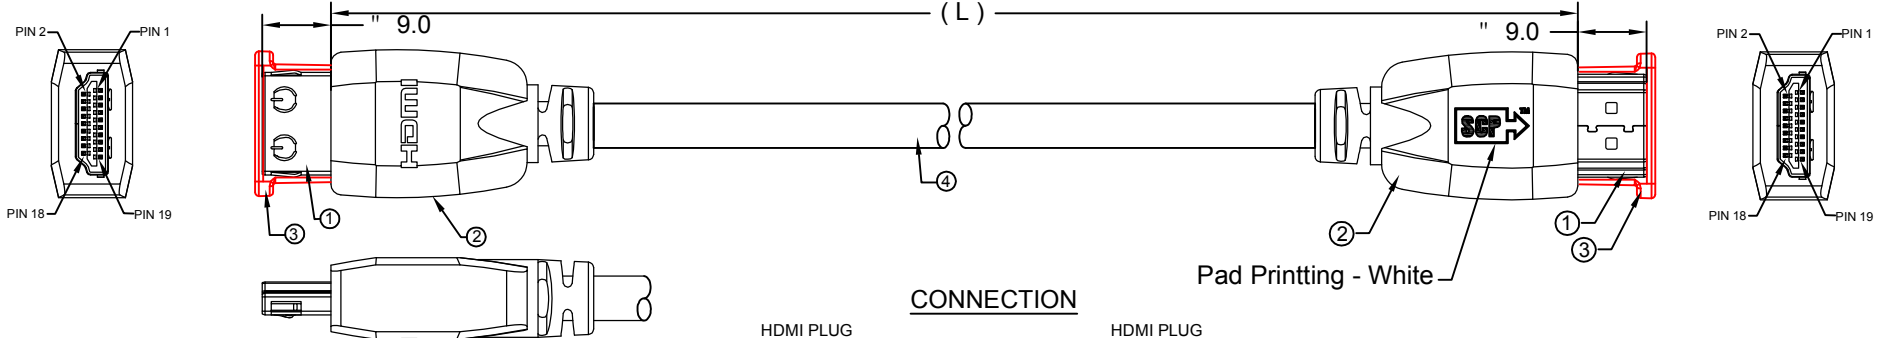

Packing: 1PC / Bag
www.scpat5e.com

Sap No.	Part No.	Length (L)
	990UHD-3	915 30mm
	990UHD-6	1800 50mm

ELECTRIC TESTING:
 1. 100% OPEN & SHORT TESTING
 2. INSULATION RESISTANCE: 20 M
 3. CONDUCTOR RESISTANCE: ! 3
 4. VOLTAGE: 300V DC/0.1S

ITEM	SPECIFICATION
4	{{(1/0.254Bc+HDPE)*1P+1/0.254Tc+AL/Mylar}*5P+(1/0.254Bc+HDPE)*4C+Filler+AL Mylar+16/13/0.08(85%)Tc Braid}*1C OD=6.0 0.15MM Jacket=Black PVC Jacket with White Text :PREMIUM HIGH SPEED HDMI R(logo) CABLE WITH ETHERNET UL(Logo) AWM 20276 VW-1 80!C 30V E81280-D CHING TAI
3	Plastic Cap-Transparent(2312110024)
2	PVC - Black 60P (31401012060)
1	HDMI Plug - Gold Plated (3033700ACG)

TOLERANCES UNLESS OTHERWISE STATED
 X. = ± 1
 .X = ± 0.2
 .XX = ± 0.1

Structured Cable Products™ Quality Installations Deserve Quality Products	
ERP NO.:	Sample No.
DOC No.:	REVISION A1
CUSTOMER:	UNIT mm
CUSTOMER P/N:	SCALE NO
DESCRIPTION Premium 2.0 HDMI A/P - HDMI A/P 30#	PAGE NO 1/1
APPROVAL	DATE 2016.05.17
CHECKED	DRAWN CJJ